


Hobelsberger Studios




ZICK ZACK LIGHT


Task Luminaire

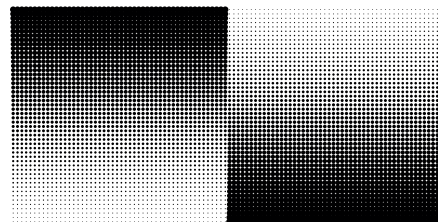


ZICK ZACK Custom Datasheet

Worldwide delivery for projects with more than 20 luminaires. Choose lamp and dimming style, finish, cable and ceiling mount color. Please get in touch to let us know your requirements at studio@hobelsberger.berlin

Lamp Types	<ul style="list-style-type: none"> • Osram SubstiTUBE Advanced UO EM 23 W 830 1500 mm non-dimmable Other lamp types upon request depending on project needs
Light Emission	3330 lm or other depending on the lamp used
Light Colour	<ul style="list-style-type: none"> • 3000K • 4000K • tunable white
Dimming	<ul style="list-style-type: none"> • Non-dimmable • ZigBee 3.0, DALI (with external driver), other systems on request
External Casing Finish Styles	Polished aluminium: <div style="display: flex; justify-content: space-around; margin-top: 10px;">    </div> <ul style="list-style-type: none"> • silver anodised • gold anodised • copper anodised
Suspension	0.6 mm steel wires, variable leveling and custom length
Length × Height × Width	1554 × 65 × 44 mm
Weight	998 g
Colour Rendering Index	83
LED Lifetime	50.000 h (L70)
UGR	≤ 19
System Power	23 W
Power Supply	220–240 V
Protection Class	SK I
Water and Dust Resistance	IP 20
Manufacturer	Lambert S.r.l Italy
Dimensions	

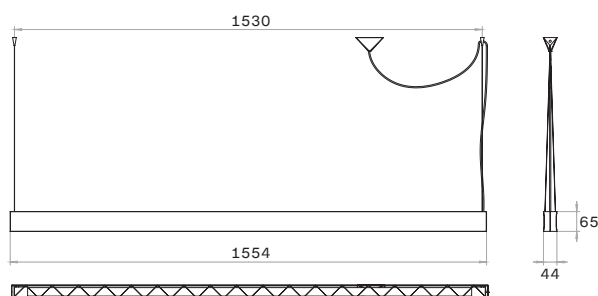

Office Lighting Standard	ZICK ZACK fulfills office lighting requirements according to EN 12464 on a task area of 1000 × 600 mm, which is suitable for most applications. Glare protection is fully given. The recommended hanging height is 1700 mm above ground.
--------------------------	--



Light Distribution	Direct 69%, indirect 31%
--------------------	--------------------------

